






# Feed-through Terminal Blocks




Feed-through terminal blocks provide the means to connect two wires together, and are available in sizes suitable for up to 8 AWG wire.




## DN-T12-A



## DN-T10-A




## DN-T8




## DN-xJ2Y

5.1 mm [0.20 in]



## DN-xJ4Y

6.1 mm [0.24 in]



|                   | Part Number | Pcs/Pkg | Price/Pkg | Part Number | Pcs/Pkg | Price/Pkg | Part Number | Pcs/Pkg | Price/Pkg |
|-------------------|-------------|---------|-----------|-------------|---------|-----------|-------------|---------|-----------|
| Gray Term Block   | DN-T12-A    | 100     | <-->      | DN-T10-A    | 100     | <-->      | DN-T8       | 50      | <-->      |
| Blue Term Block   | DN-T12B-A   | 100     | <-->      | DN-T10B-A   | 100     | <-->      | DN-T8B      | 50      | <-->      |
| Brown Term Block  | DN-T12BR-A  | 100     | <-->      | DN-T10BR-A  | 100     | <-->      | n/a         | n/a     | n/a       |
| Black Term Block  | DN-T12BLK-A | 100     | <-->      | DN-T10BLK-A | 100     | <-->      | DN-T8BLK    | 50      | <-->      |
| Green Term Block  | DN-T12GRN-A | 100     | <-->      | DN-T10GRN-A | 100     | <-->      | DN-T8GRN    | 50      | <-->      |
| Orange Term Block | DN-T12ORG-A | 100     | <-->      | DN-T10ORG-A | 100     | <-->      | DN-T8ORG    | 50      | <-->      |
| Red Term Block    | DN-T12RED-A | 100     | <-->      | DN-T10RED-A | 100     | <-->      | DN-T8RED    | 50      | <-->      |
| Yellow Term Block | DN-T12YEL-A | 100     | <-->      | DN-T10YEL-A | 100     | <-->      | DN-T8YEL    | 50      | <-->      |
| White Term Block  | DN-T12W-A   | 100     | <-->      | DN-T10W-A   | 100     | <-->      | DN-T8W      | 50      | <-->      |

### Feed-through Terminal Blocks - Specifications


|                               |                                                                                                                               |     |                    |                    |     |                  |                      |     |                  |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------|-----|--------------------|--------------------|-----|------------------|----------------------|-----|------------------|
| <b>UL Approval*</b>           | 600V                                                                                                                          | 20A | 24-12AWG           | 600V               | 30A | 24-10AWG         | 600V                 | 50A | 22-8AWG          |
| <b>CSA Approval</b>           | 600V                                                                                                                          | 20A | 24-12AWG           | 600V               | 30A | 24-10AWG         | 600V                 | 50A | 22-8AWG          |
| <b>VDE Approval</b>           | 800V                                                                                                                          | 24A | 2.5mm <sup>2</sup> | 800V               | 32A | 4mm <sup>2</sup> | 800V                 | 41A | 6mm <sup>2</sup> |
| <b>CE Conformity</b>          | CE 23/20, CE 23/21                                                                                                            |     |                    | CE 23/20, CE 23/21 |     |                  | CE 23/20, CE 23/21   |     |                  |
| <b>Agency File #</b>          | UL E179129                                                                                                                    |     |                    | UL E179129         |     |                  | UL E179129           |     |                  |
| <b>Wire Strip Length</b>      | 0.39 in [10 mm]                                                                                                               |     |                    | 0.39 in [10 mm]    |     |                  | 0.47 in [12mm]       |     |                  |
| <b>Tightening Torque</b>      | 4lb-in [0.5 N-m]                                                                                                              |     |                    | 7lb-in [0.6 N-m]   |     |                  | 10.6 lb-in [1.2 N-m] |     |                  |
| <b>Density</b>                | 60 pcs/ft [200/m]                                                                                                             |     |                    | 50 pcs/ft [166/m]  |     |                  | 43 pcs/ft [142/m]    |     |                  |
| <b>Operating Temperature</b>  | Ambient air temperature: -13°F to 104°F (-25°C to 40°C)<br>Relative humidity: 50% max at 104°F (40°C); 90% max at 68°F (20°C) |     |                    |                    |     |                  |                      |     |                  |
| <i>* For copper wire only</i> |                                                                                                                               |     |                    |                    |     |                  |                      |     |                  |

### Accessories

|                               | Part Number                                         | Pcs/Pkg | Price/Pkg | Part Number | Pcs/Pkg | Price/Pkg | Part Number | Pcs/Pkg | Price/Pkg |
|-------------------------------|-----------------------------------------------------|---------|-----------|-------------|---------|-----------|-------------|---------|-----------|
| <b>35 mm DIN Rail</b>         | DN-R35S1 (7.5 mm high) or DN-R35HS1 (15 mm high)    |         |           |             |         |           |             | 10      | various   |
|                               | DN-R35S1-2(7.5 mm high) or DN-R35HS1-2 (15 mm high) |         |           |             |         |           |             | 2       | various   |
| <b>End Bracket</b>            | DN-EB35                                             |         |           |             |         |           |             | 50      | <-->      |
|                               | DN-EB35MN                                           |         |           |             |         |           |             | 20      | <-->      |
|                               | DN-EB35-A or DN-QEB35                               |         |           |             |         |           |             | 50      | various   |
| <b>End Cover</b>              | DN-EC1210                                           |         |           |             |         |           |             | 100     | <-->      |
|                               | DN-EC1210MN                                         |         |           |             |         |           |             | 25      | <-->      |
| <b>Separator</b>              | DN-S1210                                            |         |           |             |         |           |             | 100     | <-->      |
|                               | DN-S1210MN                                          |         |           |             |         |           |             | 25      | <-->      |
| <b>Jumpers / 2 pole</b>       | DN-2J2Y                                             |         |           |             |         |           |             | 100     | <-->      |
|                               | DN-3J2Y                                             |         |           |             |         |           |             | 100     | <-->      |
|                               | -                                                   |         |           |             |         |           |             | -       | -         |
| <b>Jumper Cut Tool**</b>      | DN-24J2Y - 24 pole                                  |         |           |             |         |           |             | 5       | <-->      |
|                               | DN-24J4Y - 24 pole                                  |         |           |             |         |           |             | 5       | <-->      |
| <b>Marking Tags</b>           | DN-LA or DN-LT series                               |         |           |             |         |           |             | 500/100 | various   |
|                               | DN-L or DN-LT series                                |         |           |             |         |           |             | 500/100 | various   |
| <b>Angled Support Bracket</b> | DN-ASB1                                             |         |           |             |         |           |             | 50      | <-->      |
| <b>Top Cover</b>              | DN-C12                                              |         |           |             |         |           |             | 100     | <-->      |
| <b>Test Plug, Red</b>         | DN-TPR                                              |         |           |             |         |           |             | 10      | <-->      |
| <b>Test Plug, Black</b>       | DN-TPB                                              |         |           |             |         |           |             | 10      | <-->      |


\*\* Jumper Cutting Tools DN-JxCUT cut the applicable multi-pole jumpers and MAINTAIN THE JUMPER INSULATION

| Part Number | Length          | Height          | Thickness        |
|-------------|-----------------|-----------------|------------------|
| DN-EC1210   | 44 mm [1.73 in] | 35 mm [1.38 in] | 1.5 mm [0.06 in] |
| DN-EC1210MN | 55 mm [2.17 in] | 44 mm [1.73 in] |                  |
| DN-S1210    | 55 mm [2.17 in] | 44 mm [1.73 in] | 1.5 mm [0.06 in] |
| DN-S1210MN  | 55 mm [2.17 in] | 44 mm [1.73 in] |                  |
| DN-EC86     | 50 mm [1.97 in] | 43 mm [1.69 in] | 1.5 mm [0.06 in] |
| DN-EC86MN   | 55 mm [2.17 in] | 49 mm [1.93 in] |                  |




For more information on accessories, see the DINnectors Accessories section of this chapter.


# Feed-through Terminal Blocks

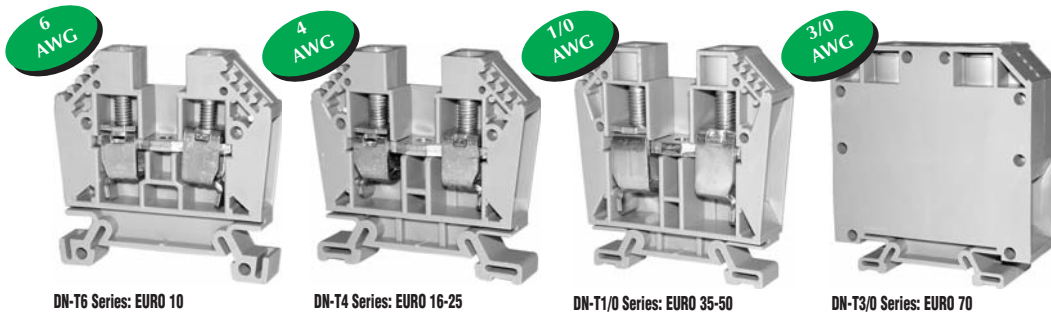


## DN-T6




## DN-T4



## DN-T1/0



## DN-T3/0



Note: Screw is a Hex Bolt, Size M8


|                                             | Part Number                                                                                                                   | Pcs/Pkg | Price/Pkg         | Part #             | Pcs/Pkg | Price/Pkg         | Part Number        | Pcs/Pkg | Price/Pkg         | Part Number        | Pcs/Pkg | Price/Pkg         |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|---------|-------------------|--------------------|---------|-------------------|--------------------|---------|-------------------|--------------------|---------|-------------------|
| Gray Term Block                             | DN-T6                                                                                                                         | 50      | <--->             | DN-T4              | 25      | <--->             | DN-T1/0            | 25      | <--->             | DN-T3/0            | 10      | <--->             |
| Blue Term Block                             | DN-T6B                                                                                                                        | 50      | <--->             | DN-T4B             | 25      | <--->             | DN-T1/0B           | 25      | <--->             | -                  | -       | -                 |
| Feed-through Terminal Blocks Specifications |                                                                                                                               |         |                   |                    |         |                   |                    |         |                   |                    |         |                   |
| <b>UL Approval *</b>                        | 600V                                                                                                                          | 65A     | 20-6 AWG          | 600V               | 85A     | 14-4 AWG          | 600V               | 130A    | 14-1/0 AWG        | 600V               | 185A    | 4-3/0 AWG         |
| <b>CSA Approval</b>                         | 600V                                                                                                                          | 80A     | 18-6 AWG          | 600V               | 105A    | 14-4 AWG          | 600V               | 130A    | 14-1/0 AWG        | 600V               | 185A    | 4-3/0 AWG         |
| <b>VDE Approval</b>                         | 750V                                                                                                                          | 63A     | 10mm <sup>2</sup> | 750V               | 110A    | 25mm <sup>2</sup> | 800V               | 150A    | 50mm <sup>2</sup> | 800V               | 192A    | 70mm <sup>2</sup> |
| <b>CE Conformity</b>                        | CE 23/20, CE 23/21                                                                                                            |         |                   | CE 23/20, CE 23/21 |         |                   | CE 23/20, CE 23/21 |         |                   | CE 23/20, CE 23/21 |         |                   |
| <b>Agency File #</b>                        | E179129, LR84816                                                                                                              |         |                   | E179129, LR84816   |         |                   | E179129, LR84816   |         |                   | E179129, LR84816   |         |                   |
| <b>Wire Strip Length</b>                    | 0.47" (12mm)                                                                                                                  |         |                   | 0.55" (14mm)       |         |                   | 0.67" (17mm)       |         |                   | 1.02" (26mm)       |         |                   |
| <b>Tightening Torque</b>                    | 18.0 lb-in (2.0Nm)                                                                                                            |         |                   | 26.5 lb-in (3.0Nm) |         |                   | 44 lb-in (5.0Nm)   |         |                   | 89 lb-in (10Nm)    |         |                   |
| <b>Density</b>                              | 33 pcs./ft. (111/m)                                                                                                           |         |                   | 25 pcs./ft. (83/m) |         |                   | 19 pcs./ft. (62/m) |         |                   | 11 pcs./ft. (38/m) |         |                   |
| <b>Operating Temperature</b>                | Ambient air temperature: -13°F to 104°F (-25°C to 40°C)<br>Relative humidity: 50% max at 104°F (40°C); 90% max at 68°F (20°C) |         |                   |                    |         |                   |                    |         |                   |                    |         |                   |
| <b>* Note: For copper wire only</b>         |                                                                                                                               |         |                   |                    |         |                   |                    |         |                   |                    |         |                   |

## Accessories

|                               | Part Number                                          | Pcs/Pkg | Price/Pkg | Part Number | Pcs/Pkg | Price/Pkg | Part Number | Pcs/Pkg | Price/Pkg | Part Number | Pcs/Pkg | Price/Pkg |
|-------------------------------|------------------------------------------------------|---------|-----------|-------------|---------|-----------|-------------|---------|-----------|-------------|---------|-----------|
| <b>35 mm DIN Rail</b>         | DN-R35S1 (7.5 mm high) or DN-R35HS1 (15 mm high)     |         |           |             |         |           |             |         |           |             | 10      | various   |
|                               | DN-R35S1-2 (7.5 mm high) or DN-R35HS1-2 (15 mm high) |         |           |             |         |           |             |         |           |             | 2       | various   |
| <b>End Bracket</b>            | DN-EB35                                              |         |           |             |         |           |             |         |           |             | 50      | <--->     |
|                               | DN-EB35MN                                            |         |           |             |         |           |             |         |           |             | 20      | <--->     |
|                               | DN-EB35-A or DN-QEB35                                |         |           |             |         |           |             |         |           |             | 50      | various   |
|                               | DN-EB35-A-10 or DN-QEB35-10                          |         |           |             |         |           |             |         |           |             | 10      | various   |
| <b>End Cover</b>              | DN-EC86                                              | 100     | <--->     | DN-EC4      | 50      | <--->     | DN-EC1/0    | 50      | <--->     | Included    | -       | -         |
|                               | DN-EC86MN                                            | 25      | <--->     | -           | -       | -         | -           | -       | -         | -           | -       | -         |
| <b>Separator*</b>             | DN-S86                                               | 100     | <--->     | -           | -       | -         | -           | -       | -         | -           | -       | -         |
| <b>Jumpers / 2 pole</b>       | DN-2J6                                               | 100     | <--->     | -           | -       | -         | -           | -       | -         | -           | -       | -         |
|                               | / 3 pole                                             | DN-3J6  | 100       | <--->       | -       | -         | -           | -       | -         | -           | -       | -         |
| <b>/ 4 pole</b>               | DN-4J6                                               | 100     | <--->     | -           | -       | -         | -           | -       | -         | -           | -       | -         |
|                               | / Multi-pole                                         | DN-5J6  | 1         | <--->       | -       | -         | -           | -       | -         | -           | -       | -         |
| <b>Marking Tags</b>           | DN-L or DN-LT series                                 |         |           |             |         |           |             |         |           |             | 500/100 | various   |
| <b>Angled Support Bracket</b> | DN-ASB1                                              |         |           |             |         |           |             |         |           |             | 50      | <--->     |

For more information on accessories, see the DINnectors Accessories section of this chapter.

| Part Number | Length          | Height          | Thickness        |
|-------------|-----------------|-----------------|------------------|
| DN-EC86     | 50 mm [1.97 in] | 43 mm [1.69 in] | 1.5 mm [0.06 in] |
| DN-EC86MN   | 55 mm [2.17 in] | 49 mm [1.93 in] |                  |
| DN-S86      | 55 mm [2.17 in] | 49 mm [1.93 in] |                  |
| DN-EC4      | 56 mm [2.21 in] | 48 mm [1.89 in] |                  |
| DN-EC1/0    | 62 mm [2.40 in] | 60 mm [2.36 in] |                  |



# Marking Accessories



DN-LB (blank) shown above



DN-LAB (blank) shown on left; part of DN-LA100 on right




DN-LTA marker shown top; DN-LT60 marker shown middle; DN-LTGND shown bottom

## DN-L

**Fits terminal block types:** All except, **Screwless DINnectors**, DN-T12-A, DN-M10-A, DN-MG, and DN-TL series  
**Material:** Thermoplastic with heat embossed black print

- Note:
- The marking sequence of 50 tags (i.e. 101-150) is printed 10 times in each package of 500 tags.
  - The DN-L tags fit all **DINnectors** 6mm wide and wider.
  - The DN-L tags fit all **DINnectors** 5mm wide and wider but will leave a gap between tags on blocks wider than 5mm.




| Marking Sequence                       | Part#   | Pcs/Pkg | Price |
|----------------------------------------|---------|---------|-------|
| 1-50                                   | DN-L50  | 500     | <-->  |
| 51-100                                 | DN-L100 | 500     | <-->  |
| 101-150                                | DN-L150 | 500     | <-->  |
| 151-200                                | DN-L200 | 500     | <-->  |
| 201-250                                | DN-L250 | 500     | <-->  |
| 251-300                                | DN-L300 | 500     | <-->  |
| 301-350                                | DN-L350 | 500     | <-->  |
| 351-400                                | DN-L400 | 500     | <-->  |
| 401-450                                | DN-L450 | 500     | <-->  |
| Blank                                  | DN-LB   | 500     | <-->  |
| L1, L2, L3, L, N, GND, +, -, COM, COM* | DN-LS   | 500     | <-->  |

## DN-QL

**Fits terminal block types:** Screwless  
**Material:** Thermoplastic with heat embossed black print. Packaged 100 labels per card, and five cards per box.

- Note:
- The marking sequence (i.e. 1-100) is printed five times in each package of 500 tags.




| Marking Sequence | Part #   | Pcs/Pkg | Price |
|------------------|----------|---------|-------|
| 1-100            | DN-QL100 | 500     | <-->  |
| 101-200          | DN-QL200 | 500     | <-->  |
| 201-300          | DN-QL300 | 500     | <-->  |
| 301-400          | DN-QL400 | 500     | <-->  |
| 401-500          | DN-QL500 | 500     | <-->  |
| Blank Tags       | DN-QLB   | 500     | <-->  |

## DN-LA

**Fits terminal block types:** DN-T12-A series  
**Material:** Thermoplastic with heat embossed black print

- Note:
- The marking sequence (i.e. 1-100) is printed five times in each package of 500 tags.
  - The DN-T12-A series is 5mm wide, so the 6mm wide DN-L tags do not fit these blocks.
  - The DN-LA tags fit all **DINnectors** 5mm wide and wider but will leave a gap between tags on blocks wider than 5mm.




| Marking Sequence                       | Part#    | Pcs/Pkg | Price |
|----------------------------------------|----------|---------|-------|
| 1-100                                  | DN-LA100 | 500     | <-->  |
| 101-200                                | DN-LA200 | 500     | <-->  |
| 201-300                                | DN-LA300 | 500     | <-->  |
| 301-400                                | DN-LA400 | 500     | <-->  |
| Blank Tags                             | DN-LAB   | 500     | <-->  |
| L1, L2, L3, L, N, GND, +, -, COM, COM* | DN-LAS   | 500     | <-->  |

## DN-LAT

**Fits terminal block types:** Triple level  
**Material:** Thermoplastic with heat embossed black print

- Note:
- The marking sequence (i.e. 1-100) is printed five times in each package of 500 tags.




| Marking Sequence                       | Part#     | Pcs/Pkg | Price |
|----------------------------------------|-----------|---------|-------|
| 1-100                                  | DN-LAT100 | 500     | <-->  |
| 101-200                                | DN-LAT200 | 500     | <-->  |
| 201-300                                | DN-LAT300 | 500     | <-->  |
| 301-400                                | DN-LAT400 | 500     | <-->  |
| Blank Tags                             | DN-LATB   | 500     | <-->  |
| L1, L2, L3, L, N, GND, +, -, COM, COM* | DN-LATS   | 500     | <-->  |

## DN-LT

**Fits terminal block types:** All except **Screwless** (see DN-QL series)  
**Material:** Thermoplastic with heat embossed black print

- Note:
- These marking tags allow the flexibility of creating custom marking sequences on site.
  - The DN-M10-A support a maximum of three digits (tags), while other **DINnectors** support up to four digits (tags).



| Marking Sequence | Part#     | Pcs/Pkg | Price |
|------------------|-----------|---------|-------|
| 1-5              | DN-LT15   | 100     | <-->  |
| 6-0              | DN-LT60   | 100     | <-->  |
| 1                | DN-LT1    | 100     | <-->  |
| 2                | DN-LT2    | 100     | <-->  |
| 3                | DN-LT3    | 100     | <-->  |
| 4                | DN-LT4    | 100     | <-->  |
| 5                | DN-LT5    | 100     | <-->  |
| 6                | DN-LT6    | 100     | <-->  |
| 7                | DN-LT7    | 100     | <-->  |
| 8                | DN-LT8    | 100     | <-->  |
| 9                | DN-LT9    | 100     | <-->  |
| 0                | DN-LT0    | 100     | <-->  |
| Unprinted        | DN-LTBINK | 100     | <-->  |
| A                | DN-LTA    | 100     | <-->  |
| B                | DN-LTB    | 100     | <-->  |
| C                | DN-LTC    | 100     | <-->  |
| D                | DN-LTD    | 100     | <-->  |
| E                | DN-LTE    | 100     | <-->  |
| F                | DN-LTF    | 100     | <-->  |
| G                | DN-LTG    | 100     | <-->  |
| H                | DN-LTH    | 100     | <-->  |
| I                | DN-LTI    | 100     | <-->  |
| J                | DN-LTJ    | 100     | <-->  |
| K                | DN-LTK    | 100     | <-->  |
| L                | DN-LTL    | 100     | <-->  |
| M                | DN-LTM    | 100     | <-->  |
| N                | DN-LTN    | 100     | <-->  |
| -                | -         | -       | -     |
| P                | DN-LTP    | 100     | <-->  |
| Q                | DN-LTQ    | 100     | <-->  |
| R                | DN-LTR    | 100     | <-->  |
| S                | DN-LTS    | 100     | <-->  |
| T                | DN-LTT    | 100     | <-->  |
| U                | DN-LTU    | 100     | <-->  |
| V                | DN-LTV    | 100     | <-->  |
| W                | DN-LTW    | 100     | <-->  |
| X                | DN-LTX    | 100     | <-->  |
| Y                | DN-LTY    | 100     | <-->  |
| Z                | DN-LTZ    | 100     | <-->  |
| ±                | DN-LTGND  | 100     | <-->  |
| +                | DN-LTPOS  | 100     | <-->  |
| -                | DN-LTNEG  | 100     | <-->  |
| ~                | DN-LTAC   | 100     | <-->  |
| =                | DN-LTDC   | 100     | <-->  |

Company Information

Systems Overview

Programmable Controllers

Field I/O

Software

C-more & other HMI

Drives

Soft Starters

Motors & Gearbox

Steppers/Servos

Motor Controls

Proximity Sensors

Photo Sensors

Limit Switches

Encoders

Current Sensors

Pressure Sensors

Temperature Sensors

Pushbuttons/Lights

Process

Relays/Timers

Comm.

Terminal Blocks & Wiring

Power

Circuit Protection

Enclosures

Tools

Pneumatics

Appendix

Product Index

Part # Index

# DINnectors Accessories – Marking

## Terminal Marking Accessories



DN-EMLBL1




DN-EMLBL2




DN-EMLBL3

| Part #           | Description            | For Use With                                                   | Pcs/Pkg | Price Each |
|------------------|------------------------|----------------------------------------------------------------|---------|------------|
| <b>DN-EMLBL1</b> | Blank labels           | DN-EMPEG1 pin protectors for DN-xEMXxx plug-in terminal blocks | 100     | <--->      |
| <b>DN-EMLBL2</b> | Labels printed 1 – 12  |                                                                | 100     | <--->      |
| <b>DN-EMLBL3</b> | Labels printed 13 – 24 |                                                                | 100     | <--->      |



DN-MTA marking tag adapter

### DN-MTA dimensions

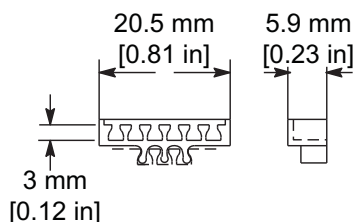

| Part#         | Description                                    | Pcs/Pkg | Price Each |
|---------------|------------------------------------------------|---------|------------|
| <b>DN-MTA</b> | Marking tag adapter holds up to six DN-LT tags | 50      | <--->      |

**Note:**  
DN-MTA adapter does not fit DN-T12-A terminal blocks.

## Marking Pen – for terminal and wire marking tags

- Permanent
- Smudge-proof
- Waterproof
- Weatherproof
- Lightfast (won't fade)
- Dries in seconds (excellent for left-handed users)
- Dry-safe (pen can be left uncapped for days without drying out)
- Low odor ink

| Part#        | Description                     | Pcs/Pkg | Price Each |
|--------------|---------------------------------|---------|------------|
| <b>DN-MP</b> | Indelible black ink marking pen | 1       | <--->      |



Marking pen

## Wire Marking Accessories



DN-WMTAG1 wire tags & DN-WM-x wire tag holders

| Part #           | Description                                                                       | For Use With                 | Pcs/Pkg | Price Each |
|------------------|-----------------------------------------------------------------------------------|------------------------------|---------|------------|
| <b>DN-WMTAG1</b> | wire tag – blank                                                                  | all DN-WM-x wire tag holders | 525     | <--->      |
| <b>DN-WM-1</b>   | wire tag holder, clear, 12 mm length, 0.051–0.118 in diameter; for 22–16 AWG wire | DN-WMTAG1                    | 200     | <--->      |
| <b>DN-WM-2</b>   | wire tag holder, clear, 12 mm length, 0.098–0.196 in diameter; for 16–11 AWG wire |                              | 200     | <--->      |
| <b>DN-WM-3</b>   | wire tag holder, clear, 12 mm length, 0.157–0.393 in diameter; for 13–5 AWG wire  |                              | 100     | <--->      |
| <b>DN-WM-4</b>   | wire tag holder, clear, 12 mm length, 0.314–0.629 in diameter; for 5 AWG wire     |                              | 100     | <--->      |